

Improving Hot Spot Problem in Layer of DL-LEACH

WooSuk LEE¹, Seung Yeon Jin², Kye-Dong Jung³, Jong-Yong Lee^{3*}

¹Department of Plasma Bioscience and Display, KwangWoon University Graduate School, Korea.

²Department of Information System, KwangWoon University Graduate School of Information Contents, Korea

³Ingenium college of liberal arts, KwangWoon University, Korea

{ leewoosuk, jins331, gdchung, *jyonglee }@kw.ac.kr

Abstract

The abstract should summarize the contents of the paper and written below the author information. Use th In Wide-area Wireless Sensor Networks, network lifetime is short due to energy consumption due to transmission distance. To improve this, we divide the sensor field into layers and reduce transmission distance through multi-hop transmission. However, there is a problem in that the transmission rate drops because there is no Cluster Head in the layer, or the transmission distance increases due to the layer, and energy is wasted. There are DL-LEACH and EDL-LEACH as Protocols to improve this. DL-LEACH uses either single-hop transmission or multi-hop transmission depending on the situation. As a result, the transmission distance is optimized, thereby reducing energy consumption. In case of EDL-LEACH, it is proposed to improve the data rate in DL-LEACH. It is the same as DL-LEACH, but the Cluster Head is mandatory for all layers to improve the transmission rate. Although there is no Cluster Head for each layer, the transmission rate is improved, but the network life is shortened. In this paper, we try to improve the network lifetime while maintaining the EDL-LEACH transmission rate. The shortened network lifetime is due to Cluster Head overload near the base station. To improve this, the Cluster Head distribution method is improved and the network lifetime is improved.

Keywords: WSN, LEACH, Protocol, Layer, Dual-hop, DL-LEACH, EDL-LEACH.

1. Introduction

It is important to minimize the energy consumption in order to maximize the network life-time, since sensor nodes in a Wireless Sensor Network have the limited energy such as a battery. [1]

There is a LEACH Protocol [2] among representatives of the routing Protocol for maximizing network life-time. LEACH Protocol shall select a Cluster Head randomly through the threshold equation as a routing Protocol based on Clustering. when a Cluster is formed, member node of Cluster transmits the data to the

Cluster Head, the Cluster Head transmits the data to the Base Station by aggregation. But LEACH Protocol is not suitable for wide area Sensor Network. Because Cluster Head may be far from the Base Station, LEACH Protocol has a problem that energy consumption is large. To solve this battery shortage problem, ML-LEACH (Multi Hop Layer – LEACH) routing Protocol that add layer conception in LEACH Protocol has been proposed. After network field of ML-LEACH is divided into several uniform layers, each layer forms a Cluster or more. It can reduce the energy consumption by reducing distance between the Cluster Head and the Base Station. In this Protocol, all node must multi-hopping to transmitting data. But this makes some node to use more useless energy. In order to improve this, DL-LEACH (Dual-Hop Layered-LEACH) that add the Dual-Hop (Single Hop + Multi Hop) [3] concept has been proposed. A single-hopping transmission is more effective to some nodes than multi-hopping transmission. In case the distance between individual node and the Base Station is shorter than the distance between individual node and the Cluster Head or the transmission distance between Cluster Head and the Base Station is shorter than the transmission distance between the Cluster Head and the next Cluster Head, single-hopping transmission is executed. Applying Dual-Hopping method that combined Single-hop and Multi-hop, DL-LEACH can optimize energy consumption and increase the network life-time.

Random Cluster Head elect algorithm based on the threshold equation cause non-uniformity of the number of Cluster Head. This means that the number of Cluster Head very changeable, too many Cluster Head or too small Cluster Head in some round. To improve this problem, Uniform Cluster Head elect algorithm was applied. And DL-LEACH still has distribution problem of Cluster Head in layers. Without evenly distribution of Cluster Head, there could be no Cluster Head or too many Cluster Head in some layer each round. EDL-LEACH (Enhanced DL-LEACH) distributes the number of Cluster Heads to be selected for each layer, the problem of the absence of Cluster Head nodes is solved. However, there is a problem that nodes near the Base Station dead quickly due to high energy consumption.

In this paper, we improve the Cluster ratio in the layer close to the Base Station to solve this problem. And we will see how much improvement we have made through simulations.

2. Body

2.1 LEACH (Low Energy Adaptive Clustering Hierarchy) Protocol

The LEACH (Low Energy Adaptive Clustering Hierarchy) routing Protocol hierarchical Clustering based routing Protocol proposed by Wendi B. Heinzelman. LEACH is divided largely into Set-Up Phase and Steady State. Set-Up Phase constitute the Cluster through the configuration of a Cluster Head node election work with the members. This multiple Clusters formed in the field through networks, and creates a hierarchical structure composed of a Cluster Head and member nodes.

2.2 ML-LEACH (Multi-hop Layered LEACH)

ML-LEACH routing Protocol is Young-II Song proposed Protocol. ML-LEACH routing Protocol is proposed to improve the LEACH Protocol to improve the phenomenon of the sharp drop in the energy efficiency in the far transmission LEACH Protocol.

ML-LEACH is configured based on the LEACH, it is a modified form of the transmission system. LEACH by changing an existing transmission system in the transmission method of multi-hop, and improving the energy consumption is proportional to the square of the maximum transmission distance and

the transmission distance between the respective sensor nodes. Multi-hop transmission method of the ML-LEACH is made of the transmission unit that is set in the field to Layer, Layer is set to be constant relative to the Base Station. Layer the more near the Base Station and is defined at a lower level, the Clustering takes place in the interior of each Layer. The Cluster Head in the ML-LEACH receives all the data of the node corresponding to the Cluster members. And sent to the Cluster Head belongs to one level lower than Layer that they belong to the data.

2.3 DL-LEACH (Dual-hop Layered LEACH)

DL-LEACH routing Protocol is a Protocol proposed by Young-Il Song, DL-LEACH is the energy consumption efficiency of the routing Protocols at the remote transport. DL-LEACH is also based on the form of LEACH and improve transmission. However unlike ML-LEACH changed the conventional transmission scheme of the transmission system of a dual-hop (Single-Hop and Multi-Hop) LEACH. The hierarchical Clustering of DL-LEACH is a member nodes and Cluster Heads in LEACH applied is maintained. Relative to the transmission of a Base Station to a Cluster Head in a long distance in the multi-hop routing scheme used. Multi-hop transmission method of the DL-LEACH is the same as that of the ML-LEACH. The nodes that are not included in the Cluster in the lowest layer are only way to transfer directly to the Base Station. That is, the single-hop transmission is performed.

2.4 EDL-LEACH (Enhanced Dual-hop Layered LEACH)

Since DL-LEACH selects the Cluster Head by probability, the Cluster Head may be selected too much or too few. This may result in the absence of the Cluster Head of the layer. If a Cluster Head member occurs, the data transmission success rate is lowered.

Therefore, we proposed EDL-LEACH to select the Cluster Head according to the node ratio of each layer to prevent the Cluster Head from being present. This distributes the number of Cluster Heads to be selected in the sensor field according to the node ratio of each layer. Therefore, by preventing the Cluster Head from being blocked, the data transmission success rate is increased.

2.5 Proposed Method

However, EDL-LEACH have a problem that nodes near the Base Station dead quickly due to high energy consumption. This is a problem that nodes in the layer close to the base station are overloaded.

In order to solve this problem, the Cluster Head selection near the base station is improved so as to be more selected.

This increases the number of Cluster Head nodes, so that the data to be provided by the nodes can be dispersed to improve the network lifetime.

Here's how to improve:

Step 1. Determine the number of Cluster Heads to be selected for the sensor space.

Step 2. The number of Cluster Heads to be selected is distributed according to the node distribution of each layer.

Step 3. The number of Cluster Heads in a layer close to the Base Station is increased and the number of Cluster Heads in other layers is decreased.

3. Simulation and Results

3.1 Radio Model

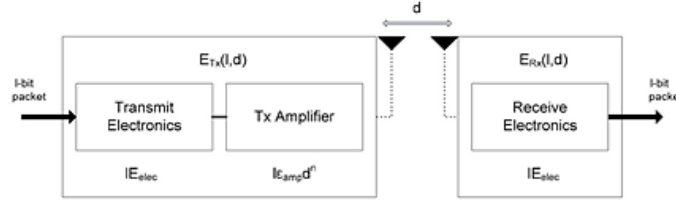


Figure 1. Radio Model

When transmitting data, transmission energy according to data size and amplification energy depends on the distance are required.

Energy consumption is proportional to the square of the distance if the transmission distance is within the free space distance, and is proportional to the fourth power of the transmission distance when the transmission distance is outside the free space. Therefore, in a wireless network, energy consumption increases as the transmission distance increases. This is shown in equation (1).

$$E_{TX}(l, d) = E_{TX-elec}(l) + E_{TX-amp}(l, d)$$

$$E_{TX}(l, d) = \begin{cases} lE_{elec} + l\epsilon_{fs}d^2, & d \leq d_0 \\ lE_{elec} + l\epsilon_{mp}d^4, & d > d_0 \end{cases} \quad (1)$$

When receiving data, it requires receiving energy according to the size of the data message. The energy equation required at this time is shown in Equation (2).

$$E_{RX}(l) = E_{RX-elec}(l) = lE_{elec} \quad (2)$$

3.2 Simulation

In order to see how much better the proposed method than the existing Protocol, a simulator is constructed with MATLAB. The transmission model uses the radio model and the radio model parameters are shown in Table 1. Table 2 shows the parameters for the simulation

Table 1. Radio Model Parameters

Parameters	Value
Data Aggregation	5nJ/bit/signal
Energy dissipation to run the radio device	50nJ/bit
Free space model of Transmitter Amplifier	10pJ/bit/m ²
Multi path model of Transmitter Amplifier	0.0013pJ/bit/m ⁴

Table 2. Simulation Parameters

Parameters	Value
Number of Sensor Nodes	100
Sensor Field	200 x 200
Position of Base Station	100 x 100
Initial Energy	0.5J
Number of Layers	3

3.3 Results

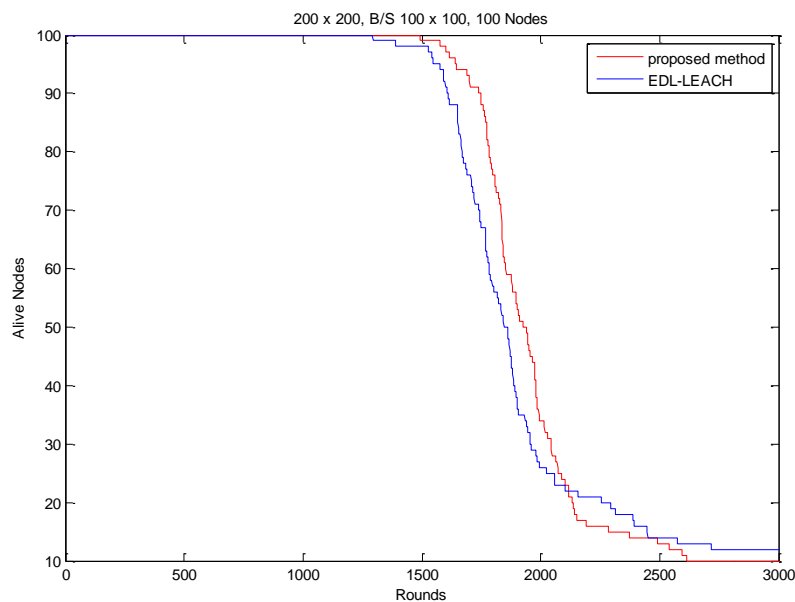


Figure 2. Simulation Result

The Graph of Figure 2 above is the result of applying the simulation parameters in Table 2. This figure is alive node per round graph, which shows that the proposed method is improved compared to the existing method. Up to 15% increase in network lifetime compared to the existing method. Table 3 shows the number of nodes and Cluster Heads per layer. Compared with the existing method, we can see that the proposed method selects more Cluster Heads near the base station.

Table 3. Number of nodes per layer

	EDL-LEACH	Proposed Method
Layer 1	31 [C/H: 3]	31 [C/H: 2]
Layer 2 [B/S Layer]	33 [C/H: 3]	33 [C/H: 5]
Layer 3	36 [C/H: 4]	36 [C/H: 3]

Table 4. Simulation Result

	EDL-LEACH	Proposed Method
FND	1293	1492 (15% ▲)
80% Node Alive	1668	1782 (6% ▲)
50% Node Alive	1845	1925 (4% ▲)
30% Node Alive	1956	2042 (4% ▲)

4. Conclusions

EDL-LEACH has been proposed to improve the transmission rate of existing DL-LEACH. EDL-LEACH improves the Cluster Head selection, which improves the data rate, but the network life is short. The shortest network lifetime is due to Cluster Head overload near the base station. To improve this, the number of Cluster Heads selected near the base station is increased. As the Cluster Head increases, the load is distributed.

As a result, the data rate is improved as compared with the DL-LEACH, and the network life can be improved.

References

- [1] J.Y. Lee and K.D. Jung and B.Shrestha and J.S. Lee “Energy Efficiency Improvement of the of a Cluster Head Selection for Wireless Sensor Networks”, International Journal of Smart Home, Vol.8, No.3 (2014), pp.9-18, 2014.
- [2] W. Heinzelman and A. Chandrakasan and H. Balakrishnan, “Energy-Efficient Communication Protocol for Wireless Microsensor Networks”, Proceedings of the 33rd Hawaii International Conference on System Sciences, 2000.
- [3] Y.I. Song, W.S. Lee, S.Y. Park, Y.M. Kim, N. Iwane, K.D. Jung, and J.Y. Lee, “Improve Energy Efficiency SEP for Wireless Sensor Networks” in Advanced and Applied Convergence, 2015, pp. 114.