

## 고출력 SOEC 시스템의 매개변수 연구

뚜안앵<sup>1,2</sup> · 김영상<sup>1,2,†</sup> · 잡반티엔<sup>1</sup> · 이동근<sup>1</sup> · 안국영<sup>1,2</sup>

<sup>1</sup>한국기계연구원 청정연료발전연구실, <sup>2</sup>과학기술연합대학원대학교 환경에너지기계공학과

## Parametric Study on High Power SOEC System

TUANANH BUI<sup>1,2</sup>, YOUNG SANG KIM<sup>1,2,†</sup>, VAN-TIEN GIAP<sup>1</sup>, DONG KEUN LEE<sup>1</sup>, KOOK YOUNG AHN<sup>1,2</sup>

<sup>1</sup>Department of Clean Fuel and Power Generation, Korea Institute of Machinery & Materials (KIMM), 156 Gajeongbuk-ro, Yuseong-gu, Daejeon 34103, Korea

<sup>2</sup>Department of Environment and Energy Mechanical Engineering, University of Science and Technology (UST), 156 Gajeongbuk-ro, Yuseong-gu, Daejeon 34113, Korea

<sup>†</sup>Corresponding author :  
yskim@kimm.re.kr

Received 1 December, 2021  
Revised 16 December, 2021  
Accepted 20 December, 2021

**Abstract >>** In the near future, with the urgent requirement of environmental protection, hydrogen based energy system is essential. However, at the present time, most of the hydrogen is produced by reforming, which still produces carbon dioxide. This study proposes a high-power electrolytic hydrogen production system based on solid oxide electrolysis cell with no harmful emissions to the environment. Besides that, the parametric study and optimization are also carried to examine the effect of individual parameter and their combination on system efficiency. The result shows that the increase in steam conversion rate and hydrogen molar fraction in incoming stream reduces system efficiency because of the fuel heater power increase. Besides, the higher Faraday efficiency does not always result a higher system efficiency.

**Key words :** Solid oxide electrolysis cell(고체 산화물 전해 전지), Parametric study(매개변수 연구), Faraday efficiency(파라데이 효율), Steam conversion rate(스팀 전환율)

## 1. Introduction

Currently, the pressure on fossil fuel reduction is increasing year by year due to global warming and climate change. This scenario opens a very promising future for hydrogen production. Not only playing as a clean fuel, hydrogen is also an alternative en-

ergy storage chemical in which electricity can be converted into hydrogen to be stored. Most of the current hydrogen produced is by reforming technologies because these technologies are mature at the time and low production cost, between 1-2 dollars<sup>1)</sup>. However, producing hydrogen by reforming also generates carbon dioxide as by product while the fu-

ture hydrogen society definitely requires a less polluted or even zero-carbon emitted technology. Electrolysis hydrogen production has recently been the center of focus because it can effectively utilize the excess electricity generated from renewable sources such as wind energy, solar energy, etc. The most challenging barrier of electrolysis hydrogen production is its high cost, normally from 3 to 6 \$/kg H<sub>2</sub> in case of polymer exchange membrane electrolysis cell<sup>2)</sup>, or 2.8 to 5.8 \$/kg H<sub>2</sub> in case of solid oxide electrolysis cell (SOEC)<sup>3,4)</sup>, a more efficient cell. In order to reduce production cost, there are several ways. Among them, increasing stack power to produce more hydrogen with the same capital cost attracting attention from researchers<sup>1,5)</sup>. This study introduces a high power SOEC system, then parametric study will be used to find optimal point.

## 2. High power SOEC system and its modeling by simulation

### 2.1 Description of analyzed system

Fig. 1 shows a flow diagram of the analyzed high power SOEC system. Liquid water is fed to pre-va-

porizer where it is heated up by the high temperature flow out from fuel heat exchanger (F-HEX). After pre-vaporizer, hot water comes to vaporizer, receiving heat from heat source such as nuclear reactor, concentrated solar panel, etc. vaporizes into steam. This steam recuperates the heat from extremely hot flue gas stream out from SOEC at the F-HEX, before going through an electrical heater (F-heater) which increases the steam temperature to SOEC operating temperature. In the remaining side of SOEC, air is blown to an air heat exchanger (A-HEX) where it receives heat from the outgoing air stream from SOEC, then once again the air stream is heated up by an electrical heater (A-heater) before being supplied to SOEC. Through the electrochemical reaction of SOEC, the supplied electricity and steam are converted into oxygen and hydrogen. Then, mixes with the unconverted steam to be H<sub>2</sub>-rich hot stream, exiting SOEC to F-HEX. After transferring heat to cold steam at F-HEX and pre-vaporizer, H<sub>2</sub>-rich stream is split into two streams; one stream is recirculated to vaporizer to recover steam and also keep H<sub>2</sub> molar fraction in inlet steam higher than certain value<sup>6)</sup>. The remaining flows through condenser where steam condenses, and is removed from gaseous mixture which is finally

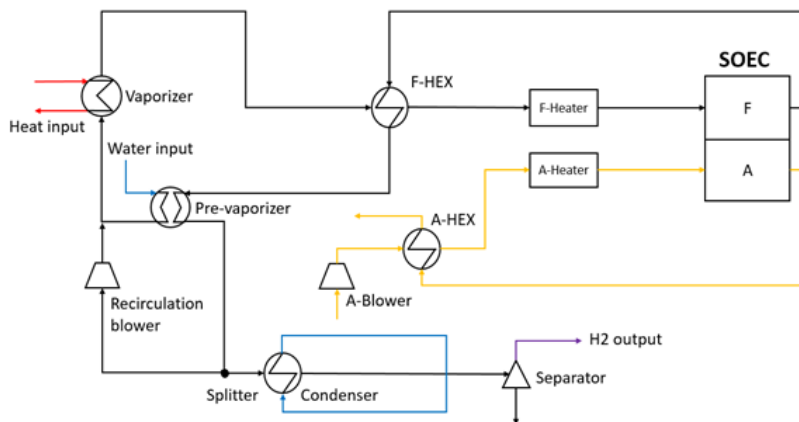


Fig. 1. Flow diagram of the high power SOEC system

separated to get pure hydrogen.

### 2.2 Assumption used in the system simulation

Table 1 summarizes the assumptions used in system modeling and simulation<sup>7-11</sup>. The current density is assumed to be 1 A/cm<sup>2</sup> higher than almost normal SOEC<sup>5,12,13</sup>. Beside, operating condition of cell is chosen at 715°C and 1 atm. Furthermore, the 36 kW stack includes 380 cells. Other essential coefficients such as inverter efficiency, Faraday efficiency, heat loss are set at widely used values: 92%, 92%, and 5%, respectively<sup>10</sup>. Lastly, the heat supplied to SOEC system is assumed from a 300°C waste steam stream with mass flow rate of 15 kg/h.

### 2.3 Genetic algorithm optimization

The analyzed cycle was modeled using the EBSILON<sup>®</sup> (Steag, Zwingenberg, Germany) Professional commercial software package<sup>14</sup>. Fig. 2 shows a screenshot of the EBSILON software used for the analyzed cycle. During optimization process genetic algorithm is employed to find optimal point. Though genetic


**Table 1.** Assumptions and parameters used in system simulations

Parameter	Value	Unit
SOEC stack		
Operating pressure	1	atm
Temperature	715 <sup>7)</sup>	°C
Current density	1 <sup>8)</sup>	A/cm <sup>2</sup>
Cell voltage	1.285 <sup>9)</sup>	V
Cell number	350	cells
Faraday efficiency	92	%
Heat loss	5 <sup>10)</sup>	%
Input heat (external steam)		
Temperature	300 <sup>11)</sup>	°C
Mass flow rate	15	kg/h

algorithm does not guarantee the global optimal point, this result suggests a parameter set for further investigation or analysis.

## 3. Performance analysis

To examine the performance of SOEC system, parametric analysis method is conducted with external steam temperature, heat exchanger effectiveness, steam conversion rate, hydrogen molar fraction, Faraday efficiency, and cell voltage. Table 2 shows the range of each variable in parametric study and optimization<sup>6,9,11,15</sup>. In each examination, only studied parameter varies, others are kept at design condition. On the other hand, in the final step all listed parameters with their ranges are brought into an optimization to find the optimal condition. In both

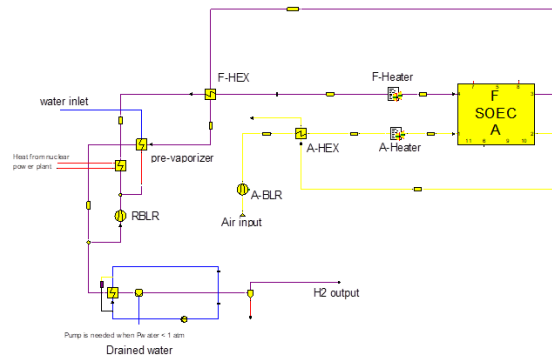

**Fig. 2.** Screenshot of the EBSILON software used for the simulation

**Table 2.** Variable range in parametric study and optimization

Variable name	Unit	Range
HEX eff	-	0.7-0.9
Steam temperature	°C	200-700 <sup>11)</sup>
Steam conversion rate	-	0.5-0.8 <sup>15)</sup>
H <sub>2</sub> molar fraction (xH <sub>2</sub> )	-	0.2-0.5 <sup>6)</sup>
Faraday efficiency	-	0.92-0.97
Cell voltage	V	1.285-1.305 <sup>9)</sup>

parametric studies and optimization, system efficiency is measured for comparison. Eq. (1) describes how system efficiency is calculated.

$$\eta_{sys} = \frac{\dot{m}_{H_2out} \times LHV_{H_2}}{E_{in}} \quad (1)$$

where:

$\eta_{sys}$  : system efficiency

$\dot{m}_{H_2out}$  : mass flow rate of produced hydrogen

$LHV_{H_2}$  : low heating value of hydrogen at 25°C

## 4. Result and discussion

### 4.1 Effect of external steam temperature and heat exchanger effectiveness

The figures show the system efficiency as function of each parameter in parametric study. In Fig. 3, external steam temperature is proportional to the amount of heat fed to the system, so the system efficiency increases when steam temperature increases, as expected. In the same way, the HEX effectiveness also affects positively to the system efficiency because it performs the heat recuperation of heat exchanger as shown in Fig. 4. Moreover, the dependence of system efficiency to HEX effectiveness is

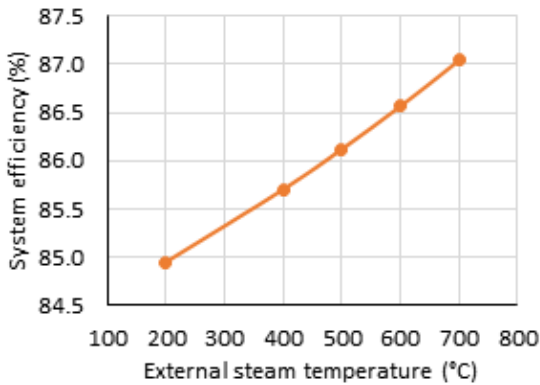


Fig. 3. System efficiency depends on the external steam temperature

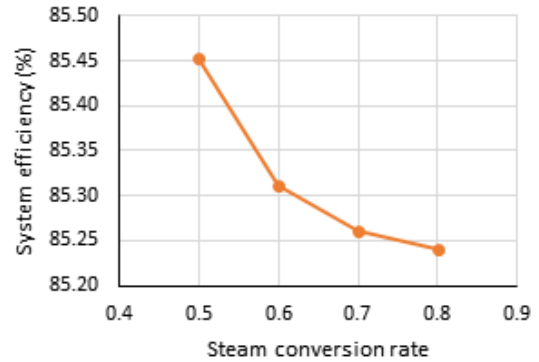


Fig. 5. System efficiency depends on the steam conversion

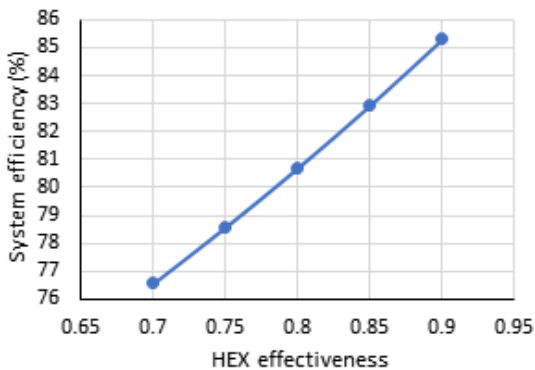


Fig. 4. System efficiency depends on the HEX effectiveness

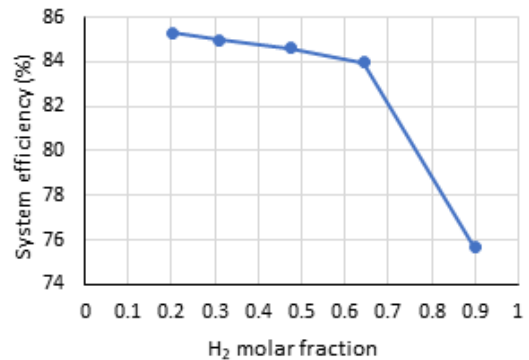


Fig. 6. System efficiency depends on the H<sub>2</sub> molar fraction

very high; about 10 percent points increases in system efficiency when HEX effectiveness changes from 0.7 to 0.9.

### 4.2 Effect of steam conversion rate and hydrogen molar fraction

Fig. 5 shows the system dependence on steam conversion. When steam conversion rate increases, the H<sub>2</sub> content in the output of SOEC stack is also higher, leading to the lower recirculation flow, and then less recovered heat from fuel off-gas. As a result, the fuel heater power increases, causing slightly decrease in system efficiency. In Fig. 6, the effect of hydrogen molar fraction is quite similar to that of steam conversion rate. A higher hydrogen molar

fraction in stack inlet stream requires a smaller recirculation flow, leading to less recuperated heat amount. Consequently, the F-heater has to provide more heat to achieve design temperature, reducing total system efficiency. However, the amplitude is bigger than that in Fig. 5 due to the higher recycle blower power consumption.

### 4.3 Effect of Faraday efficiency and cell voltage

Fig. 7 shows the dependency of system efficiency on Faraday efficiency. The SOEC efficiency increases with Faraday efficiency. However, it affects the heat release from or absorption into SOEC stack, consequently the whole system efficiency does not

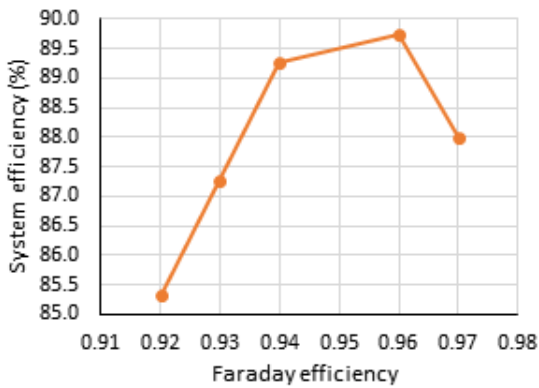


Fig. 7. System efficiency depends on faraday efficiency

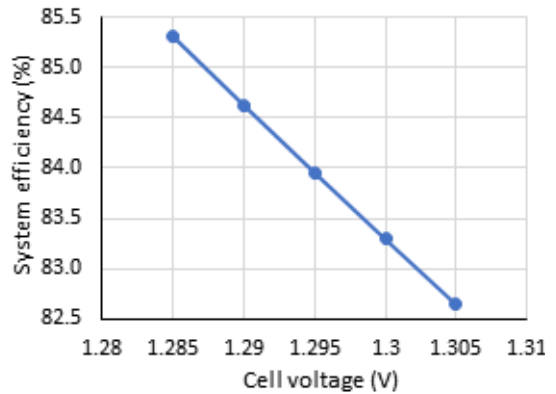


Fig. 8. System efficiency depends on the cell voltage

Table 3. Optimization result

Faraday efficiency	Cell voltage	HEX effectiveness	External steam temperature	Steam conversion rate	H <sub>2</sub> molar fraction inlet	System efficiency
0.92	1.285	0.9	700	0.58	0.280	87.167
0.93		0.9	700	0.68	0.251	88.833
0.94		0.9	700	0.58	0.207	91.382
0.95		0.9	700	0.75	0.285	91.437
0.96		0.9	700	0.58	0.201	92.133
0.97		0.787	700	0.57	0.200	92.434

always increase with Faraday efficiency's increase. The maximum system efficiency is 89.7% when Faraday efficiency is 0.96. In Fig. 8, system efficiency decreases when cell voltage increases because SOEC works at low faraday efficiency (0.92) that is in exothermic condition. Therefore, the higher voltage makes the higher loss.

#### 4.4 Optimization

Because Faraday efficiency effect is not monotonous, it is set at discrete values from 0.92 to 0.97 in optimization. Besides, the cell voltage also chosen at 1.285 V where the stack is almost at thermal balance point, neither absorb nor release heat<sup>9)</sup>. In addition, the parametric study in the previous section also pointed out the system efficiency is maximum with cell voltage value of 1.285 V.

Table 3 shows the optimization results with Faraday efficiency from 0.92 to 0.97. In all the cases, the optimal results are found at the boundary value of the external steam temperature, 700°C. However, the result also shows that, though the effect of all parameters are monotonous, the optimal point is not always achieved when the examined variables at the boundary. For example, when Faraday efficiency is 0.97, optimal point is achieved at HEX effectiveness of 0.787, steam conversion rate of 0.57 and hydrogen molar fraction of 0.200. This reveals the combination and correlation effect between the parameters.

Though genetic algorithm does not guarantee the global optimal point, this result suggests a parameter set for further investigation or analysis.

## 5. Conclusions

This study proposes a high power SOEC system and then, examined the effect each parameter includ-

ing external steam temperature, heat exchanger effectiveness, steam conversion rate, hydrogen molar fraction, Faraday efficiency, and cell voltage to the system efficiency. Finally, the optimization based on genetic algorithm was conducted to see the combining effect of all listed parameters on system performance. In conclusion, there are several points can be summarized as following:

Higher steam conversion rate leads to high concentration of H<sub>2</sub> in the recirculation flow, hence the fuel heater power increases. As a result, the system efficiency drops as fuel utilization increases.

Faraday efficiency increase can make SOEC changes from exothermic to endothermic condition, thus the system efficiency trend and the optimal points of the operation changed too.

The genetic optimization method showed the optimal point in which endothermic operation is better option.

The concentration of H<sub>2</sub> in the feed fuel, steam conversion rate, and Faraday efficiency should be simultaneously considered in optimizing system operation.

## Acknowledgments

This work was supported by the Korea Institute of Energy Technology Evaluation and Planning (KETEP) and the Ministry of Trade, Industry & Energy (MOTIE) of the Republic of Korea (No. 20213030040110).

## References

1. F. O. Ayodele, S. I. Mustapa, B. V. Ayodele, and N. Mohammad, "An overview of economic analysis and environmental impacts of natural gas conversion technologies", *Sustainability*, Vol. 12, No. 23, 2020, pp. 10148, doi: <https://doi.org/10.3390/su122310148>.
2. D. Peterson, D. A. DeSantis, and M. Hamdan, "DOE hydrogen and fuel cells program record 20004: cost of electrolytic hydrogen production with existing technology", 2020.

3. D. Peterson, E. L. Miller, A. Brisse, J. Hartvigsen, R. J. Petri, G. G. Tao, and S. Satyapal, "DOE Hydrogen and fuel cells program record 16014: hydrogen production cost from solid oxide electrolysis", *Hydrogen*, 2016. Retrieved from [https://www.hydrogen.energy.gov/pdfs/16014\\_h2\\_production\\_cost\\_solid\\_oxide\\_electrolysis.pdf](https://www.hydrogen.energy.gov/pdfs/16014_h2_production_cost_solid_oxide_electrolysis.pdf).
4. V. T. Giap, Y. D. Lee, Y. S. Kim, and K. Y. Ahn, "Techno-economic analysis of reversible solid oxide fuel cell system couple with waste steam", *Trans Korean Hydrogen New Energy Soc*, Vol. 30, No. 1, 2019, pp. 21-28, doi: <https://doi.org/10.7316/KHNES.2019.30.1.21>.
5. Y. Zheng, J. Wang, B. Yu, W. Zhang, J. Chen, J. Qiao, and J. Zhang, "A review of high temperature co-electrolysis of H<sub>2</sub>O and CO<sub>2</sub> to produce sustainable fuels using solid oxide electrolysis cells (SOECs): advanced materials and technology", *Chemical Society Reviews*, Vol. 46, No. 5, 2017, pp. 1427-1463.
6. Q. P. Fang, L. Blum, R. Peters, M. Peksen, P. Batfalsky, and D. Stolten, "SOFC stack performance under high fuel utilization", *International Journal of Hydrogen Energy*, Vol. 40, No. 2, 2015, pp. 1128-1136, doi: <https://doi.org/10.1016/j.ijhydene.2014.11.094>.
7. R. Elder, D. Cumming, and M. B. Mogensen, "Chapter 11-high temperature electrolysis", *Carbon Dioxide Utilisation*, 2015, pp. 183-209, doi: <https://doi.org/10.1016/B978-0-444-62746-9.00011-6>.
8. M. B. Mogensen, M. Chen, H. L. Frandsen, C. Graves, J. B. Hansen, K. V. Hansen, A. Hauch, T. Jacobsen, S. H. Jensen, T. L. Skafta, and X. Sun, "Reversible solid-oxide cells for clean and sustainable energy", *Clean Energy*, Vol. 3, No. 3, 2019, pp. 175-201, doi: <https://doi.org/10.1093/ce/zkz023>.
9. HELMETH, "High temperature electrolysis cell (SOEC)". Retrieved from <http://www.helmeth.eu/index.php/technologies/high-temperature-electrolysis-cell-soec>.
10. V. Saarinen, J. Pennanen, M. Kotisaari, O. Thomann, O. Himanen, S. Di Iorio, P. Hanoux, J. Aicart, K. Couturier, X. Sun, M. Chen, and B. R. Sudireddy, "Design, manufacturing, and operation of movable 2 × 10 kW size rSOC system", *Fuel Cells*, Vol. 21, No. 5, 2021, pp. 477-487, doi: <https://doi.org/10.1002/fuce.202100021>.
11. Y. S. Kim, Y. D. Lee, K. Y. Ahn, D. K. Lee, S. M. Lee, and E. J. Choi, "Operation characteristics according to steam temperature and effectiveness of external steam-related SOEC system", *Trans Korean Hydrogen New Energy Soc*, Vol. 31, No. 6, 2020, pp. 596-604, doi: <https://doi.org/10.7316/KHNES.2020.31.6.596>.
12. J. Schefold, A. Brisse, and H. Poepke, "23,000 h steam electrolysis with an electrolyte supported solid oxide cell", *International Journal of Hydrogen Energy*, Vol. 42, No. 19, 2017, pp. 13415-13426, doi: <https://doi.org/10.1016/j.ijhydene.2017.01.072>.
13. J. Schefold, A. Brisse, A. Surrey, and C. Walter, "80,000 current on/off cycles in a one year long steam electrolysis test with a solid oxide cell", *International Journal of Hydrogen Energy*, Vol. 45, No. 8, 2020, pp. 5143-5154, doi: <https://doi.org/10.1016/j.ijhydene.2019.05.124>.
14. EBSILOW, "Technologies, S.E.S.-S". Retrieved from: <https://www.ebsilon.com/en/>.
15. G. Schiller, M. Lang, N. Monnerie, H. v. Storch, J. Reinhold, and P. Sundarraj, "Solar heat integrated solid oxide steam electrolysis for highly efficient hydrogen production", *Journal of Power Sources*, Vol. 416, 2019, pp. 72-78, doi: <https://doi.org/10.1016/j.jpowsour.2019.01.059>.