

# Implementation of User Interface and Web Server for Dynamic Signature Verification

\*Jin-Whan Kim, \*Hyuk-Gyu Cho and \*\*Eui-Young Cha

## Abstract

This paper is a research on the dynamic signature verification of error rate which are false rejection rate and false acceptance rate, the size of signature verification engine, the size of the characteristic vectors of a signature, the ability to distinguish similar signatures, and so on. We suggest feature extraction and comparison method of the signature verification. Also, we have implemented our system with Java technology for more efficient user interfaces and various OS Platforms.

*Key Words : Dynamic (On-line) Signature Verification, Biometric Authentication, User Interface, JAVA Technology*

\* School of Computer, Youngsan University

\*\* Dept. of Computer Science, Pusan National University

## 1. Introduction

The biometric technology allows for a greater reliability of authentication as compared with badges, card readers or password systems. The chances of an individual losing his/her biometric information are far less the forgetting a password or losing a card. Through these types of verification, comes an increased role of responsibility, and security.

All biometric techniques have false accepts generated by the imperfections of the classification method or by errors in the acquisition device. However, dynamic signature verification using behavioral biometric technique, compared with physiological biometric techniques such as fingerprint, face, iris or retina, have additional advantage that a forger with not-enough information about the true signature could not deceive the verification algorithm because multi-dimensional feature information of dynamic signature, that is, speed of stroke, size of signature, pressure, variable shape, pen down/up information and so on, decrease the risk of accepting skilled forgeries since they are not available to the forger

## 2. Dynamic Signature Verification System

Dynamic (On-line) signature verification field has gained increasing attention in recent times. As one of the biometric authentication methods, signature has been widely accepted in real life, because it is user-friendlier than fingerprint, iris, retina and face. Signatures are acquired using digitizing tablet that captures both

temporal and spatial information, such as coordinates, pressure, inclinations, etc.

Two aspects pose challenges in the field of dynamic signature verification. On one side, intra-personal variation can be large. Some people provide signatures with poor consistency. The speed, pressure and inclinations pertaining to the signatures made by the same person can differ greatly, which makes it quite challenging to extract consistent features. On the other side, we can only expect few samples from one person and no forgeries in practice. This makes it very difficult to determine the consistency of extracted features. According to our experience, one of the most reliable features is the shape of the signature. The next reliable feature is the speed of writing. Due to lack of benchmark databases for on-line signatures, we will not argue the consistency of these features here but propose a novel similarity measure for signature verification.

The errors of verification can be classified in two categories false rejection rate (FRR) indicates the rate of genuine signatures rejected that is, evaluates the number of false signatures classified as real one False acceptance rate (FAR) indicates the rate of accepted forgeries that is, measures the number of genuine signatures classified as forgeries. The Equal Error Rate (EER) corresponds to the error value for which FAR is equal to FRR. These rates determine the quality of an authentication system, but the acceptable values depend on the level of security desired for a specific application.

Anyway, EER provides an estimate of the statistical

performance of the algorithm.

### 3. Proposed Feature Extraction

We introduce useful feature points in our on-line signature verification system. Finding out the best method to calculate the degree of similarity is very important. The previous approach for that is to select and arrange distinctive points. For the best signature verification, it is important to reduce the range of variation of the true signature and to extend distinctiveness between the true and forgeries. Assigning the adequate weight for each feature is another important point.

The useful feature points are below:

- Speed, velocity, acceleration, pressure information
- Shape of coordinates, direction and slope between two points
- Number of pen down/up points
- Information of pen down/up movement (Fig. 1)
- Total time taken in signing
- Pen down/up time between strokes
- Number of strokes
- Total number of coordinates

Our system primarily uses directions and absolute distances (in Fig. 2) between two points for the pen down/up strokes. We know that these two features include many information of the signature that is, the shape and speed, information of strokes, elapsed time and so on with our experiment and experience.

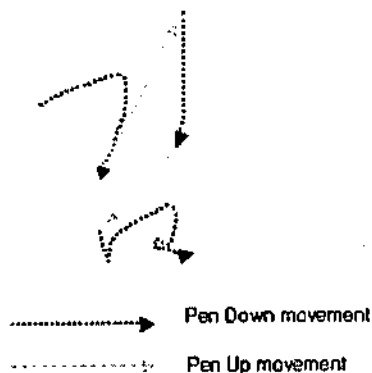


Fig. 1. Pen Up/Down movement

The feature vectors of pen down movement have values of 1 to 36 directions. And the feature vectors of pen up movement have values of 91 to 126 directions. But, distances have absolute length of value between two points as Fig. 2. All distances are defined less than 128. So, these directions and distances can be stored as byte strings in small memory.

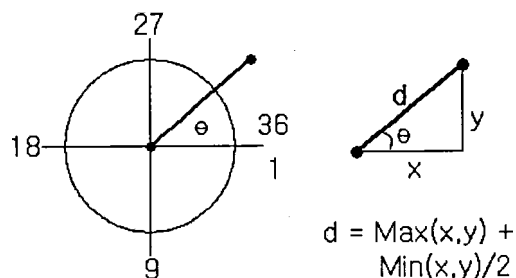


Fig. 2. Signature features of direction and distance

### 4. Proposed Comparison method

One of the most important difficulties in authentication using on-line signatures is the choice of the comparison method. On-line signatures are given by a sequence of points sorted with respect to acquisition time. Since two signatures of the same person cannot be completely identical, we must make use of a measure that takes into account this variability. Indeed, two signatures cannot have exactly the same timing, besides these timing differences are not linear. Dynamic Time Warping as Fig. 3 is an interesting tool; it is a method that realizes a point-to-point correspondence. It is insensitive to small differences in the timing. Calculation distances between signatures with DTW allows to achieve a verification system more flexible, more efficient and more adaptive than the systems based on neural networks or Hidden Markov Models, as the training phase can be incremental. This aspect is very important when we must enroll our new signature along the years or new environment.

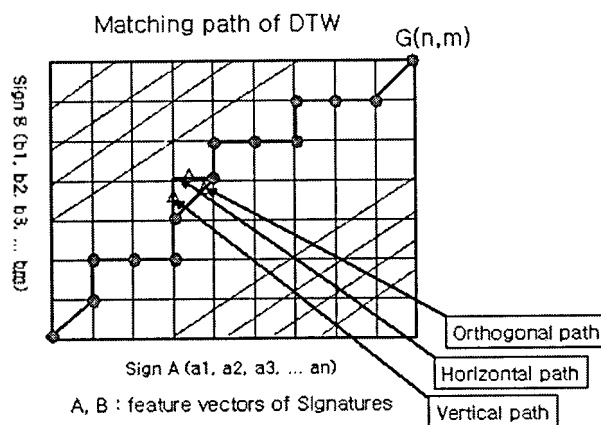


Fig. 3 Method of Dynamic Time Warping

Given two sequences  $A = (a_1, a_2, \dots, a_n)$  and  $B = (b_1, b_2, \dots, b_m)$ , the distance  $DTW(A,B)$  is similar to edit distance. To calculate the DTW distance  $G(A,B)$ , we can first construct an n-by-m matrix, as shown in

Fig. 3. Then, we find a path in the matrix which starts from cell (1, 1) to cell (n,m) so that the average cumulative cost along the path is minimized. If the path passes cell (i, j), then the cell (i,j) contributes cost(ai, bj) to the cumulative cost. The cost function can be defined flexibly depending on the application, for example,  $cost(ai, bj) = |ai-bj|*weight$ . This path can be determined using dynamic programming, because the recursive equation holds:

$$G(i, j) = [cost(ai, bj) + \min\{G(i-1, j)+w1, G(i-1, j-1)+w2, G(i, j-1)+w1\}] * \max(i,j) / \min(i,j) / (i+j)$$

The path may go several cells horizontally along A or vertically along B, which makes the matching between the two sequences not strictly one-one but one-many and many-one. This is the robustness that DTW provides to align sequences. Also we suggest that w1 and w2 are very important weight value for the measure of similarity in DTW. We are very satisfied with the EER (Equal Error Rate) of our system.

### 5. Implementation of User Interface and Web Server

Design of easy user interface is one of the most important things for the DSVS.

We provide two windows (Fig. 5 and Fig. 7) for the dynamic signature verification system. Fig. 5 is a window to save signer's signature feature vectors in remote database. First step: Signer writes his signature on the white rectangle area and then click 'Register' button. Second step: Signer writes his same signature again and then clicks 'Test&Verify' button to see recommended security level and degree of similarity in Fig. 6 between two signatures. According to the results of several times trial, the signer can choose his security level. If the signer clicks 'Save' button finally, his signature's feature vectors, security level, ResidentID and password are saved in remote sign database.

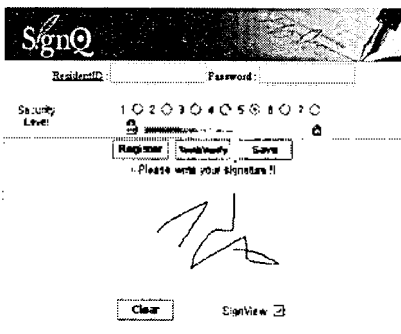


Fig. 5. Signature register

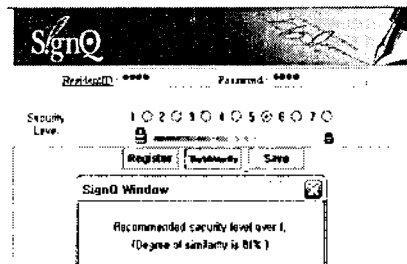


Fig. 6. Signature testing

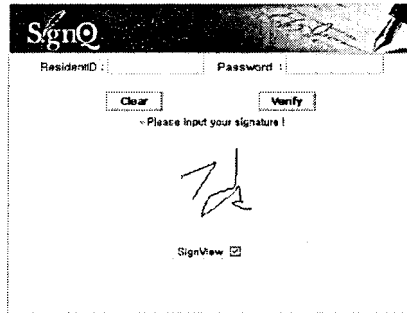


Fig. 7. Signature verification

Above Fig. 7 is user interface window to verify the signer's authentication and 'SignView' check button is a function to display or disappear the writing signature.

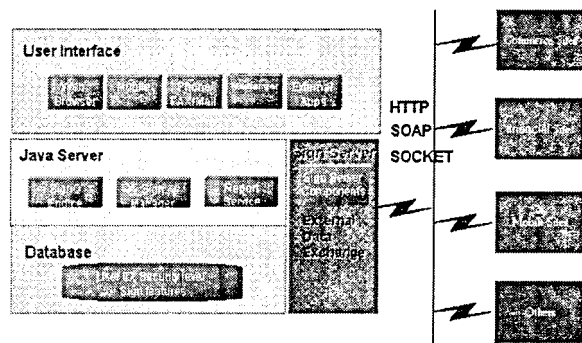


Fig. 8. Components of the sign server

These interface windows for the DSVS are implemented with JAVA technology to support various OS platforms and anyone can test the DSVS at our web site : [http://www.mmigroup.net/en/mmi\\_products\\_signq.php](http://www.mmigroup.net/en/mmi_products_signq.php)

We have used JAVA applet for sign input window, JAVA servlet for server side authentication, RESIN for servlet container, JSP and HTML for interface window, and MySQL for sign database.

### 6. Performance Results

The characteristics of our system are as follows;

1) Dynamic Time Warping (DTW) well known for excellent pattern matching algorithm has been modified and applied to this system. Reliability for checking the similarities of the signatures is high and a newly developed fast algorithm in processing time is adopted in the system. To make access easier, we considered efficient user interface design.

2) Size of feature vector for the signature is very small. It needs 20byte-250byte of memory capacity to register feature information of signature in average.

3) Processing time must be fast for the verification. In general DTW system, it is good to check similarity between patterns, but it has defect to make processing time because of computing complexity of data to be processed. But in our system we make compressed data and the data structure well designed which is not affected by time so that the verification is processed within 0.01 second at IBM compatible PC (CPU: 650MHz, Main Memory 64MB).

4) Security must be excellent. By recommendation of the feedback system, the signer can choose the security level of seven classes according to skillfulness of the signer.

5) The size of signature engine is small. Our engine's size is 32KB for Win9x/ME/2000, 6KB for WinCE, 6KB for JAVA. So, our system can be used in small handy device.

6) This system can be applied to a wide range of security systems with low cost because of strong independence of input device such as electronic pen, mouse, digitizer and so on.

7) Like changing PIN number and password, user can change his (her) signature, as he (she) want.

8) Using dynamic information makes nearly hacking impossible.

9) Error rate is low and robust for weather, temperature, physical condition, outside noise and so on.

10) Especially in case of using PDA, Web pad, Tablet PC, Panel PC, smart-phone etc., signature security system is economical and simple because you install just our software program without purchasing any input devices.

11) Error rate (rejection rate for true signer and acceptance rate for forgery signature) is very low. (Nearly 0 for random forger)

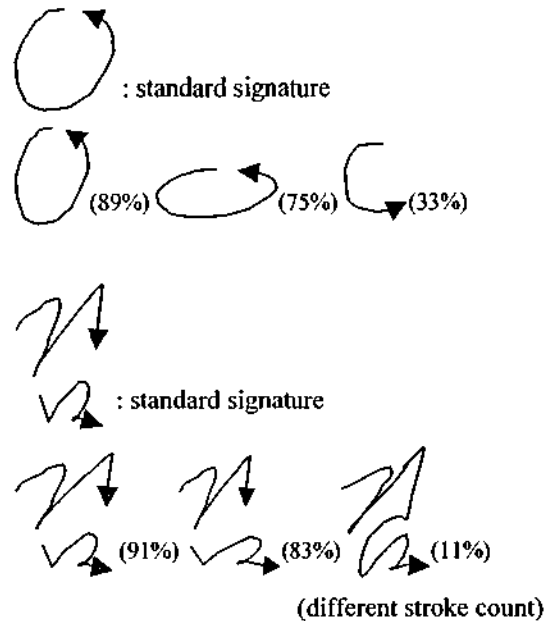
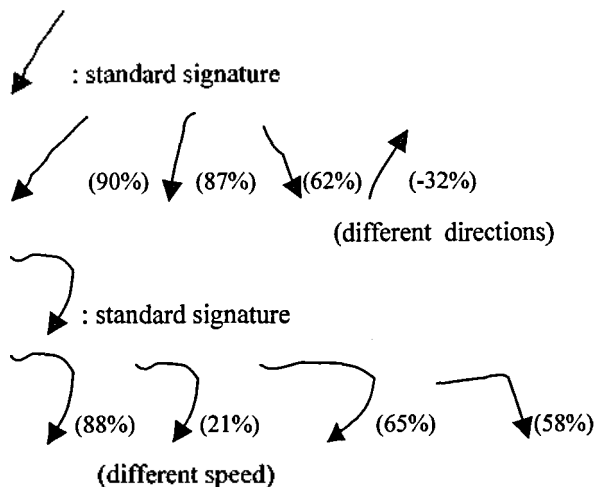


Fig. 9. Degree of similarity between two similar signatures

## 7. Conclusions

The importance of security is emphasized more and more at present.

In conclusion, it is quite evident that the DSVS is here to stay as the most valuable form of not only computer-related security, but in a plethora of other forms also. Markets to be penetrated include using the DSVS for passports, birth certificates, forensics, banking, ticket-less air travel, computer log-in, driving licenses, automobile ignition and unlocking, anti-terrorism, anti-theft, and to replace the archaic use of PIN and passwords. As the technology becomes increasingly produced and the market fully embraces the newest forms of biometric security, biometric solutions will inevitably become cheaper and more abundant in the information systems market and therefore available to almost anybody with a need for enhanced security measures.

We have described feature extraction, matching method, implementation of user interface and web server, and performance results of our dynamic signature verification system.

## References

- [1] J.W. Kim, H.G. Cho, E.Y. Cha, "A Study on the Dynamic Signature Verification System", *International Journal of Fuzzy Logic and Intelligent System*, vol. 4, no. 3, Dec 2004 pp. 271-276
- [2] J.W. Kim, H.G. Cho, E.Y. Cha, "A Study on the Evaluation of Dynamic Signature Verification System",

- IT SoC Conference 2004 pp. 583-587, Korea
- [3] H. Lei, V. Govindaraju, "A Study on the Consistency of Features for On-line Signature Verification", Joint IAPR International Workshops on Syntactical and Structural Pattern Recognition (SSPR 2004) and Statistical Pattern Recognition (SPR 2004).
- [4] M. Wirotius, J.-Y. Ramel, N. Vincent, "Selection of Points for On-Line Signature Comparison", Ninth International Workshop on Frontiers in Handwriting Recognition (IWFHR'04), October 2004 pp. 503-508
- [5] G. Dimauro, S. Impedovo, M. G. Lucchese, R. Modugno, G. Pirlo, "Recent Advancements in Automatic Signature Verification", Ninth International Workshop on Frontiers in Handwriting Recognition (IWFHR'04), October 2004 pp. 179-184
- [6] Hansheng Lei, Srinivas Palla, Venu Govindaraju, "ER: An Intuitive Similarity Measure for On-Line Signature Verification", Ninth International Workshop on Frontiers in Handwriting Recognition (IWFHR'04), October 2004 pp. 191-195
- [7] Sascha Schimke, Claus Vielhauer, Jana Dittmann, "Using Adapted Levenshtein Distance for On-Line Signature Authentication", Pattern Recognition, 17th International Conference on (ICPR'04) Volume 2, August 2004 pp. 931-934
- [8] Flor Ramirez Rioja, Mariko Nakano Miyatake, Hector Perez Meana, Karina Toscano, "Dynamics features Extraction for on-Line Signature verification", 14th International Conference on Electronics, Communications and Computers, February 2004 pp. 156
- [9] M. Munich, P. Perona, "Visual identification by signature tracking", IEEE Trans. on Pattern Analysis and Machine Intelligence, 2003.
- [10] Alessandro Zimmer, Lee Luan Ling, "A Hybrid On/Off Line Handwritten Signature Verification System", Seventh International Conference on Document Analysis and Recognition Volume I, August 2003 pp. 424
- [11] Mingfu Zou, Jianjun Tong, Changping Liu, Zhengliang Lou, "On-line Signature Verification Using Local Shape Analysis", Seventh International Conference on Document Analysis and Recognition Volume I, August 2003 pp. 314
- [12] Mohammad M. Shafiei, Hamid R. Rabiee, "A New On-Line Signature Verification Algorithm Using Variable Length Segmentation and Hidden Markov Models", Seventh International Conference on Document Analysis and Recognition Volume I, August 2003 pp. 443
- [13] A.K. Jain, F. D.Griess, S.D. Connell "On-line signature verification", Pattern Recognition, Vol. 35, 2002, pp.2963-2972.
- [14] C. Quek, R.W. Zhou, "Antiforgery: a novel pseudo-outer product based fuzzy neural network driver signature verification system", Pattern Recognition, Vol. 23, 2002, pp.1795-1816.
- [15] M. Fuentes, S. Garci-Salicetti, B. Dorizzi, "On line Signature Verification: Fusion of a Hidden Markov Model and a Neural Network via a Support Machine", Proc. of IWFHR-8, Canada, 2002, pp.253-258.
- [16] G. Dimauro, S. Impedovo, R. Modugno, G. Pirlo, L. Sarcinella, "Analysis of Stability in Hand-Written Dynamic Signatures", Proc. IWFHR-8, Canada, 2002, pp. 259-263.
- [17] Masahiro Tanaka, Yumi Ishino, Hironori Shimada, Takashi Inoue, "DP Matching Using Kalman Filter as Pre-Processing in On-Line Signature Verification", Eighth International Workshop on Frontiers in Handwriting Recognition (IWFHR'02), August 2002 pp. 502
- [18] Marc Fuentes, Sonia Garcia-Salicetti, Bernadette Dorizzi, "On-Line Signature Verification: Fusion of a Hidden Markov Model and a Neural Network via a Support Vector Machine", Eighth International Workshop on Frontiers in Handwriting Recognition (IWFHR'02), August 2002 pp. 253
- [19] Andrea Vergara da Silva, Daniel Santana de Freitas, "Wavelet-Based Compared to Function-Based On-Line Signature Verification", XV Brazilian Symposium on Computer Graphics and Image Processing (SIBGRAPI'02), October 2002 pp. 218
- [20] H. S. Yoon, J. Y. Lee, H. S. Yang, "An On-Line Signature Verification System Using Hidden Markov Model in Polar Space", Eighth International Workshop on Frontiers in Handwriting Recognition (IWFHR'02), August 2002 pp. 329
- [21] Claus Vielhauer, Ralf Steinmetz, Astrid Mayerhofer, "Biometric Hash based on Statistical Features of Online Signatures", 16th International Conference on Pattern Recognition (ICPR'02) Volume 1, August 2002 pp. 10123
- [22] D.Sakamoto, H.Morita, T.Ohishi, Y.Komiya, T.Matsumoto, "On-line Signature Verification Algorithm Incorporating, Pen position, Pen pressure and Pen inclination trajectories", Proc. of. 2001 IEEE international conf. Acoustics, Speed and signal processing, Vol. 2. Page. 993-996, 2001.
- [23] Taik H.Rhee, Sung J. Cho, Jin H. Kim "On-line Signature Verification Using Model-Guided Segmentation and Discriminative feature Selection for Skilled Forgeries", Proc. Of. Sixth International conf. On Document Analysis and recognition, page. 645-649, 2001.
- [24] D. Letjman and S. George, "On-line handwritten signature verification using wavelets and back-propagation neural networks", Proc. of ICDAR '01, Seattle, 2001, pp. 596-598.
- [25] H. Baltzakis, N. Papamarkos, "A new signature verification technique based on a two-stage neural network classifier", Engineering Application of AI, Vol. 14, 2001, pp. 95-103.
- [26] C. Vielhauer, R. Steinmetz, "Transitivity Based Enrollment Strategy for Signature Verification", International Conference on Document Analysis and Recognition (ICDAR), 1:1263-1266, 2001
- [27] K. Tanabe, M. Yoshihara, H. Kameya, S. Mori, S. Omata, T. Ito, "Automatic Signature Verification Based

- on the Dynamic Feature of Pressure", Sixth International Conference on Document Analysis and Recognition (ICDAR '01), September 2001 pp. 1045
- [28] Ma Mingming, W. S. Wijesoma and Eric Sung, "An automatic on-line signature verification system based on tree models", in Proc of Canadian Conference on Elect and Comp. Eng., pp.890-894, 2000.
- [29] Yue,K.W.;Wijesoma,W.S. Wijesoma, "Improved segmentation and segment association for on-line signature verification", Systems ,Man ,and Cybernetics , 2000 IEEE International Conference on, Volume : 4, 2000
- [30] T. Ohishi, Y. Komiya, T. Matsumoto, "On-line Signature Verification using Pen-Position, Pen-Pressure and Pen Inclination trajectories", ICPR'00-volume 4, September 03-08,2000
- [31] S. Hangai, S. Yamanaka, T. Hamamoto, "On-line signature verification based on altitude and direction of pen movement", International Conference on Multimedia (ICME), 1:489-492, 2000
- [32] K.W.Yue and W.S.Wijesuma, "Improved Sementation and segment Association for On-line Signature Verification", Proc. Of. 2000 IEEE International conf. On Systems Man and Cybernetics, Vol. 4, page. 2752-2756, 2000.
- [33] R. Plamondon, Sargur N. Srihari, "On-line and Off-line Handwriting Recognition A comprehensive Survey", IEEE transaction on patter analysis and machine intelligence, Vol. 22,No.1, page. 63-78, January 2000
- [34] L.P. Cordella, P. Foggia, C. Sansone, F. Tortorella , M. Vento, "A Cascaded Multiple Expert System for Verification", in Multiple Classifier Systems, ed. J.Kittler and F.Roli, LNCS, Springer 2000, pp. 330-339.
- [35] V. Di Lecce, G. Dimauro, A. Guerriero, S. Impedovo, G. Pirlo, A. Salzo, "A Multi-Expert System for Dynamic Signature Verification", in Multiple Classifier Systems, eds.J.Kittler and F.Roli, LNCS, Springer 2000, pp.320-329.
- [36] E. Newham, "Survey: Signature Verification Technologies", Bit (2000), 8-10.
- [37] F. D. Griess, "On-line Signature Verification", Projet Report, Michigan State University, Department of Computer Science and Engineering, 2000.
- [38] T. Wessels and C. Omlin, "A Hybrid System for Signature Verification," Proc. South African Telecommunications Networks and Applications Conf., pp. 5509-5514, 2000.
- [39] V. Di Lecce, A. Guerriero, G. Dimauro, S. Impedovo, G. Pirlo, A. Salzo, L. Sarcinella, "Selection of Reference Signatures for Automatic Signature Verification", Fifth International Conference on Document Analysis and Recognition, September 1999 pp. 597
- [40] X.H. Xiao, G. Leedham, "Signature Verification by Neural Networks with Selective Attention", Applied Intelligence, Vol .11, 1999, pp. 213-223.
- [41] M. E. Munich, P. Perona, "Continuous Dynamic Time Warping for Translation Invariant Curve Alignment with Applications to Signature Verification", (1999), Available at: <http://citeseer.nj.nec.com/munich99continuous.html>.
- [42] J.G.A. Dolfing, E.H.L. Aarts and J.J.G. M., "On-line signature verification with hidden markov models",In Proceedings of the International Conference on Pattern Recognition, pages 1309, August 1998.
- [43] Nai-Jen Cheng ; Chi-Jain Wen ; Hon-Fai Yau ; David Hwang Liu; Kuei Liu ; Kun-Chi Cheng ,Bor-Shenn Jeng, "Online Chinese signature verification with mixture of experts, Security Technology", Proceeding . ,32nd Annual 1998 International Carnahan Conference on ,1998.
- [44] T. Ruggles, "Comparison of Biometric Techniques",Technical Report for The Biometric Consulting Group (1998), Available at: <http://biometricconsulting.com/bio.htm>
- [45] V.DiLecce,G.Dimauro,A.Guerriero,S.Impedovo,G.Pirlo, A.Salzo, L.Sarcinella,"Selection of Reference Signatures for Automatic Signature Verification", Proc.ICDAR'99,India, 1999, pp. 597-600.
- [46] R. Kashi, J. Hu, W.L. Nelson, W. Turin, "A Hidden Markov Model approach to on-line handwritten signature verification", IJDAR, Vol. 1, 1998, pp. 102-109.
- [47] Q.-Z.Wu, S.-Y.Lee, I.-C.Jou, "On-line signature verification based on logarithmic spectrum", Pattern Recognition, Vol. 31, No. 12, 1998, pp. 1865-1871.
- [48] B. Wirtz, "Technical Evaluation of Biometric Systems", Proc. of ACCU '98, Hong Kong, 1998.
- [49] C. Schmidt, K.-F. Kraiss, "Establishment of personalized templates for automatic signature verification", Proc. ICDAR '97, IEEE Press, pp. 263-267.
- [50] Q.Z. Wu, S.-Y. Lee, I-C. Jou, "On-line signature verification based on split-and-merge matching mechanism", Pattern Recognition Letters , Vol. 18 , 1997, pp. 665-673.
- [51] V.S. Nalwa., "Automatic on-line signature verification", Proceedings of the IEEE,85(2), pp. 213-239, 1997.
- [52] R. Plamondon, "A Kinematic Theory of Rapid Human Movements: Part III: Kinetic Outcomes", Biological Cybernetics, Jan. 1997.
- [53] R. Bajaj, S.Chaudhury, "Signature Verification using multiple neural classifiers", Pattern Recogn., Vol.30, No.1, 1997, pp.1-7.
- [54] B. Wirtz, "Average Prototypes for Stroke-Based Signature Verification", Proc. ICDAR '97, IEEE Press, pp. 268-272.
- [55] R. Sabourin, G. Genesi, F. Preteux, "Off-line Signature Verification by Local Granulometric Size Distributions", IEEE TPAMI, Vol. 19, n. 9, 1997, pp. 976-988.
- [56] K. Huang and H. Yan, "Off-line signature verification based on geometric feature extraction and neural network classification", Pattern Recognition,Vol. 30, No.1, 1997, pp.9-17.